




SPECIALTY WIRE DRAWING LUBRICANTS

Head Office:
1103/G-1 Tagore Nagar
Ludhiana, India 141001
Phone: +91-98763-98761
Email: info@metlub.com
Web: www.metlub.com

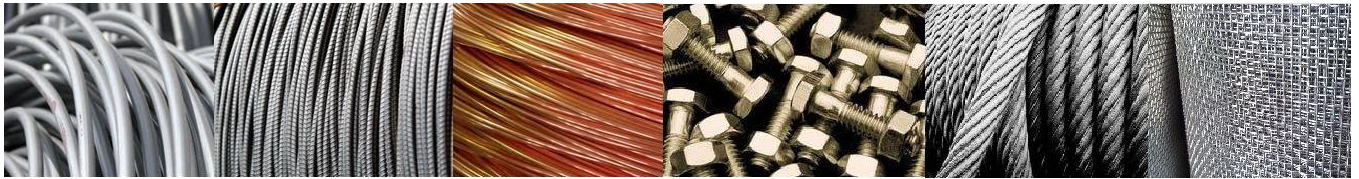

Wire Drawing Lubricants

HIGH CARBON STEEL

- EZ-41T** EZ 41T IS A CALCIUM STEARATE BASED LUBRICANT THAT CONTAINS EXTREME PRESSURE (E.P.) ADDITIVES, ORGANIC VISCOSITY IMPROVERS AND OTHER LUBRICITY AGENTS. THIS COMBINATION OF INGREDIENTS PROVIDES EXCEPTIONAL LUBRICATING PROPERTIES AND LEAVES A HOMOGENEOUS RESIDUAL ON THE DRAWN WIRE. SUITABLE FOR MECHNAICALLY/CHEMICALLY DESCALED,WIRE ROD BREAK DOWN OF HIGH CARBON AND STAINESS STEEL WIRE. SUITABLE FOR DRAWING AT HIGH SPEED.
- EZ-595** A RICH SODIUM HIGH MELTING POINT SOAP POWDER RECOMMENDED FOR USE ON MORE SEVERE DRAFTING APPLICATIONS OR WHERE LESS THAN EFFECTIVE DIE AND BLOCK COOLING EXISTS. USED FOR HIGH SPEED DRAWING APPLICATIONS ON BOTH HIGH CARBON AND STAINLESS STEEL, OR SOMETIMES USED WITH ONE OF THE CALCIUM BASED RIPPER BOX LUBRICANTS.
- LUBRA-G** SOLUBLE WET WIRE DRAWING GEL, FOR USE IN HIGH SPEED, WET WIRE DRAWING FOR VERY FINE SIZ-